



ELM SITE SERVICES
PROJECT DATASHEET

LNER station public toilet refurbishment

LNER · Nine stations, Peterborough to Berwick-upon-Tweed · £2.3m · Rail



CLIENT
LNER

SECTOR
Rail

VALUE
£2.3m

LOCATION
Nine stations, Peterborough to Berwick-upo

TYPE
Refurbishment / public facilities

STATUS
Completed



OVERVIEW

Competitive tender: public toilets at nine LNER-managed stations on the London to Edinburgh route, with a social-value commitment to local labour and suppliers.

SCOPE OF WORKS

- Strip-out to substructure and LNER public-realm fit-out at nine stations
- Below-ground drainage connecting to street drainage
- Power, fuse boards, wiring and wireless-monitored emergency lighting
- Changing Places facility at Retford

CONSTRAINT

Widely spread sites and complete power replacement as part of modernisation.

APPROACH


A common LNER product theme across all nine stations: Altro Whiterock walls; Altro Reliance Storm floors; TBS Amwell cubicles and IPS; Ideal Standard sanitaryware; CDUK Corian Oxford trough sinks; Hostwave and Crompton lighting; Dimplex, Solray and Myson heaters.

OUTCOME


Toilets modernised across the route, including Changing Places at Retford.




PROJECT PHOTOGRAPHY

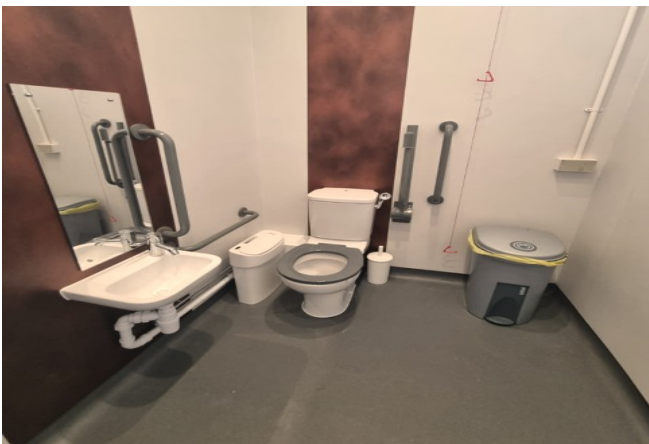

DRAWINGS FROM THE PROJECT RECORD

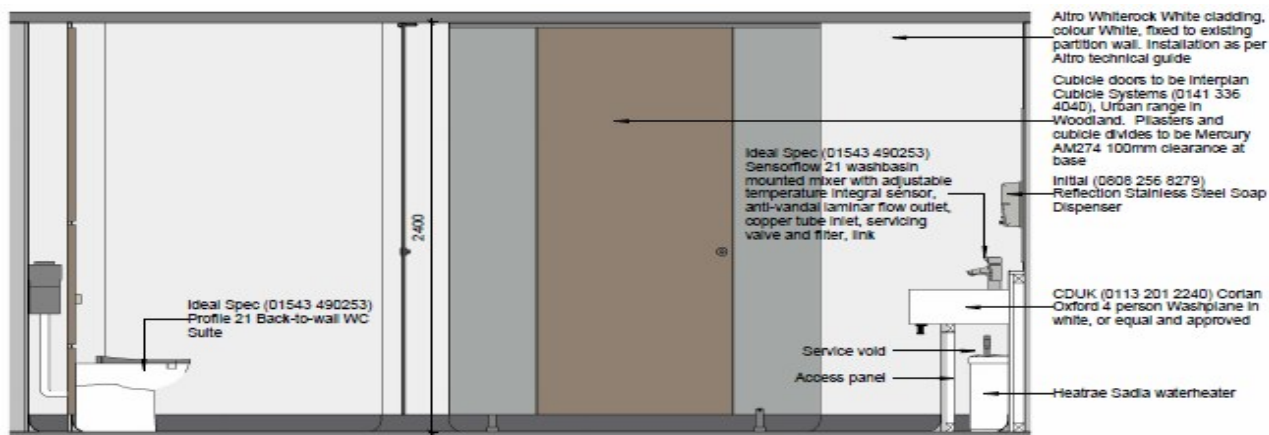


MALE TOILET ELEVATION

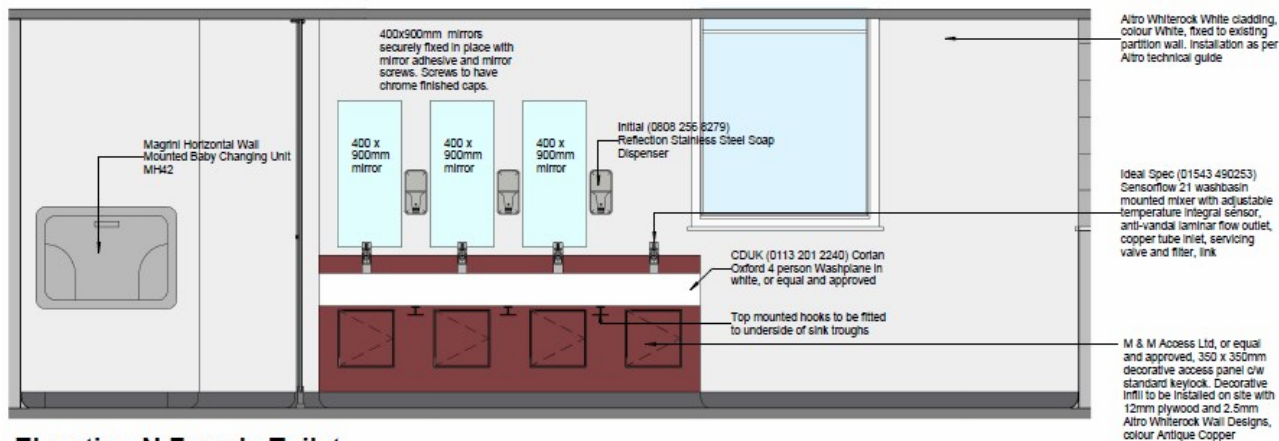

Elevation N Female Toilet

FEMALE TOILET ELEVATION

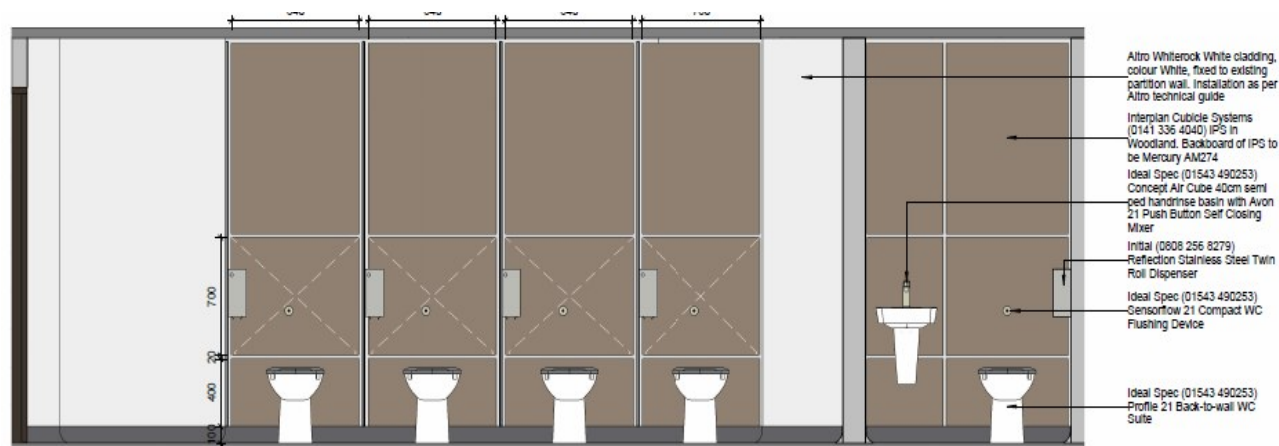

CUBICLE ELEVATION

DRAWINGS FROM THE PROJECT RECORD

